



AUSTRALIA'S FAVOURITE AIR™



AIR CONDITIONING RANGE

Ducted

Cassette

Under Ceiling and Floor Console

Multi Systems

ERV's

If it can be designed, we can air condition it.

All over Australia, Fujitsu air conditioning is being installed in some of the most innovative and unusual building applications. That's because our systems offer incredible design flexibility, smoother more efficient control and lower running costs.

So whether you need to air condition a few rooms or a few towers, Fujitsu has the solution. No wonder it's Australia's Favourite Air.

Features



Up/Down Swing Louvre

The up/down louvre automatically swings up and down.



Right/Left Swing Louvre

The right/left louvre automatically swings in either direction.



Double Swing Automatic

Complex swing action of the louvres enables them to swing automatically in both horizontal and vertical directions.



Automatic Louvre

The position of the louvres is set automatically to match the operating mode. It is also possible to adjust the louvres using the remote control.



Auto Shut Louvre

The auto shut louvres close or open automatically when the unit stops or starts.



Automatic Air Flow Adjustment

The micro-processor adjusts the airflow to follow changes in room temperature.



Auto Restart

Should there be temporary loss of power; the unit will automatically restart itself in the same operating mode, once the power is restored.



Auto-Changeover

The unit automatically switches between heating and cooling modes based on the temperature setting and room temperature.



Economy Mode

Limits the maximum operation current, and performs operation with the power consumption suppressed.



Sleep Timer

The micro-processor gradually changes the room temperature, allowing you to sleep comfortably at night.



Program Timer

This timer allows selection of one of four options. ON, OFF, ON ---> OFF, or OFF ---> ON.



ON-OFF Timer

ON-OFF timer can be set to operate once every 24 hours.



Weekly Timer

Different on-off times can be set for up to 7 days.



Weekly + Setback Timer

Weekly + Setback timer can set temperature for two time spans and for each day of the week.



Connectable Distributing Duct

Conditioned air can be distributed to adjacent areas by means of a distribution duct.



Connectable Fresh Air Duct

Allows introduction of fresh air to occupied space.



Fresh Air Intake

Fresh air can be taken in by a fan which can be connected using UTD-ECS5A* (optional parts).



Energy Saving Mode

This mode raises the set temperature slightly in the cooling mode and lowers the set temperature in the heating mode to economically control the operation of the unit.



Filter sign

Indicates the filter cleaning period by lamp.



Control Port

External inputs and outputs contained within the product allow on/off control, fresh air interlock connection and heater bank element connection. UTD-ECS5A* (optional parts)



V-PAM

V-Pam Inverter technology increases the maximum output of the compressor significantly and enables high power and high efficiency.



I-PAM

I-Pam inverter technology enables high output and high efficiency performance.



Apple-catechin Filter



Long-life Ion Deodorisation Filter



Washable Panel



Blue Fin Heat Exchanger

Corrosion-resistance of the heat exchanger in coastal areas has been improved by blue fin treatment of the outdoor unit heat exchanger.



All DC

With All DC, electricity loss is decreased and power consumption reduced.



Air Clean Filter



Cooling



Heating

“With over 100 different brands of air conditioners on the market, how do you know you’re choosing the right one?”

Well, my advice is to go with a name you can trust, which is why I bought a Fujitsu.

No other company can match their wide range, exceptional economy and superior efficiency. And with their famous 5 year parts and labour warranty, it’s no wonder Fujitsu is Australia’s Favourite Air.”



CONTENTS

Inverter Technology	4
About Ducted Systems	5
Ducted	6
Cassette	12
Under Ceiling and Floor Console	14
Multi Systems	16
ERV's	22




Inverter Technology

What's an Inverter?


Through new, advanced technology, Inverter air conditioners are more economical to operate and quieter to run than conventional units. They can handle greater extremes in temperature, are smoother and more stable in operation and reach the desired temperature more quickly than conventional air conditioners.

Room warming speed

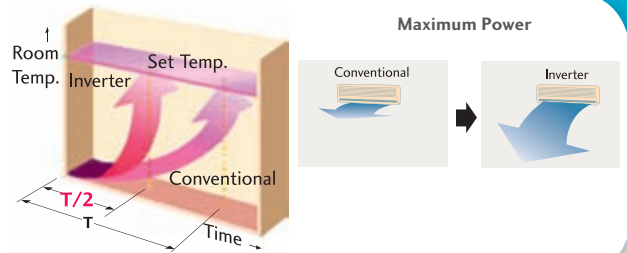

Inverter Control

The Inverter component allows the outdoor unit to vary its speed and output to match the required capacity of the indoor unit. Thus, the Inverter model can achieve 30% more operating efficiency than conventional models and therefore, is much cheaper to run.

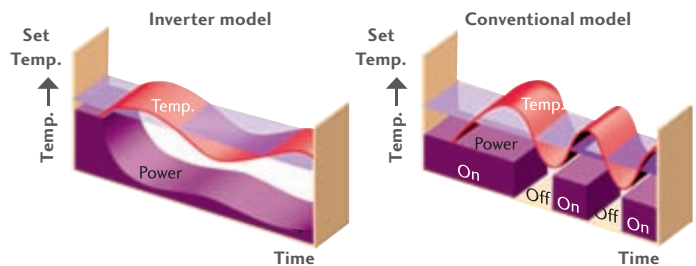


Optimised Inverter Control




I-PAM (IPM*+PAM) Inverter Control

I-PAM inverter control is a technology which reduces loss by adjusting the current waveform to a better sine waveform. This promotes the effective use of the input power supply to attain high performance.

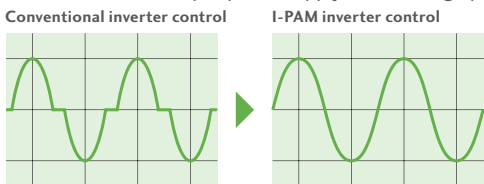

IPM*: Intelligent Power Module

In addition, the voltage is raised at the start of operation and fast comfort is attainable by more powerful operation.

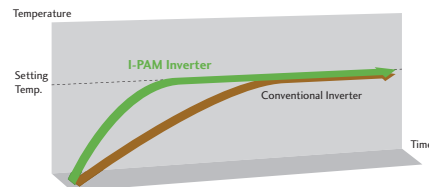

This technology enables miniaturisation and high performance of the compressor.



V-PAM (Vector+I-PAM) Inverter Control

V-PAM inverter control reduces the effects of magnetic flux and increases the maximum speed and efficiency of the compressor by vector control technology. With this technology, further miniaturisation, higher efficiency, and better performance are attained.

More compact than conventional models



Vector I-PAM




It becomes more powerful with the newly developed high efficiency compressor motor control.

All DC Components




By utilising a DC Compressor and Fan Motor, electricity loss is decreased and power consumption is substantially reduced. In addition, by increasing the air flow on high speed, the heat exchanger efficiency has been improved which has reduced the overall annual power consumption.

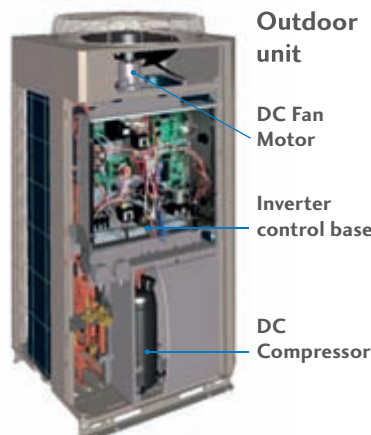


High Efficiency DC Twin Rotary Compressor

A high performance, low noise, large capacity DC Twin Rotary Compressor is used for the large three phase ducted systems. The New DC Twin Rotary Compressor has a substantially increased refrigerant intake and compression efficiency which allows for an improvement in overall system energy efficiency.

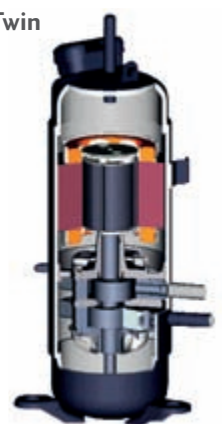

About Ducted Systems

What is a ducted air conditioner?

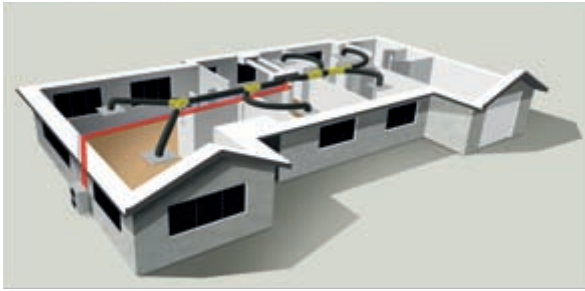

Fujitsu ducted systems are able to deliver comfort to every room in your home by using a system of ductwork installed in your ceiling space. Also, by only requiring one outdoor unit, they take up minimal space outside of your home. Talk to a Fujitsu specialist today about a ducted system – your whole house air conditioning solution.

Cool vs Reverse

Fujitsu air conditioners are great for keeping you cool in summer, but did you know they are also one of the most cost effective ways of warming your home in winter? Unlike other traditional heaters, they can warm your home faster and more efficiently. In winter when running on heating mode the process is “reversed”. Reverse cycle air conditioners absorb heat from the outside, and transfers that heat to the indoor environment keeping you warm in winter. Fujitsu air conditioners are designed to cool or heat your home even in the most extreme conditions. This makes a Fujitsu air conditioner the perfect comfort solution, all year around.



The ultimate in air conditioning

Ducted air conditioning is surely the ultimate in comfort. The Fujitsu ducted models offer quiet, efficient operation, are easy to maintain, and operate via a wall mounted LCD control that controls all functions of the system.

Invisible comfort

Whatever shape the room, ducted units create uniform temperatures throughout. The unit is totally concealed, usually within a ceiling void. Cool or warm air is then ducted into each room through outlets positioned in the walls, floor or ceiling. Easily controlled, Fujitsu’s ducted systems provide comfort throughout your house without leaving cool or hot spots.

The ducted air conditioning system

- Perfect comfort throughout each room
- Visually appealing
- Concealed installation
- Reverse cycle heating and cooling
- Quiet operation
- Easy-to-use LCD controller.

New ARTG High Static ducted features

Space saving

Compact Size

High performance has been realised with a compact indoor/outdoor unit.

Due to the compact size of the indoor and outdoor unit, the installation space required has been reduced allowing for a wider selection of installation locations.

INDOOR UNIT



OUTDOOR UNIT



Control options



Standard



Option

Dual remote controllers (optional)


An additional remote controller can be added up to the maximum of two remote controllers. The timer functions can only be used on the control which was chosen as the master controller during installation.



Group control


One remote controller can control up to 16 air conditioners. All of the air conditioners will be operated with the same settings.

Example of ducted system configuration

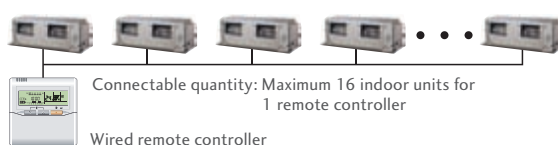

Room temperature control

- Remote controller has temperature sensor built in.
- User can select between Remote Controller temperature sensor and Return Air Sensor on unit.
- Return Air Sensor on unit can be replaced with Wall Mounted Remote Sensor (optional part UTY-XSZX).

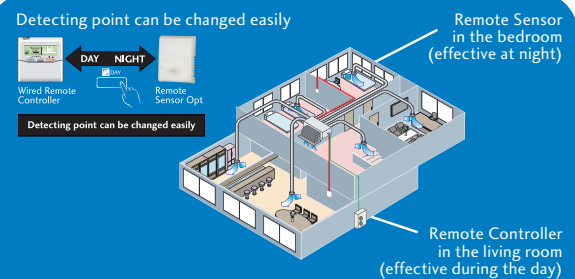

Quiet operation

The Indoor Fan noise has been reduced due to the new designed structure of the indoor unit.


Previous model	New model
49dB(A)	45dB(A)

*ARTG54L at 100pa, fan mode: Hi


External control

Indoor functions

1. Fresh air output port. External fresh air fans can be connected to run in conjunction with the fan motor of the indoor unit.




2. Electrical heater output port. An External Electrical heater can be set to operate in conjunction with the heating cycle.



3. External input port. Start/stop of the air conditioner can be controlled from external equipment.

Cobalt Heat exchanger



- Hydrophillic coating
- Cobalt Blue protection
- Standard cromate protection
- Aluminium base material

The outdoor unit fins are coated with a blue corrosion resistant material to enhance durability and extend performance life of your air conditioner.

Wide outdoor operating range

Cooling and heating operation can be performed at low ambient conditions

Cooling
Min -5°C to Max 46°C

Heating
Min -15°C to Max 24°C




Inverter Ducted

Inverter Ducted Split System – Bulkhead Type

ARTG18L

C 5.2 kW / 17,700 BTU/h

H 6.0 kW / 20,500 BTU/h

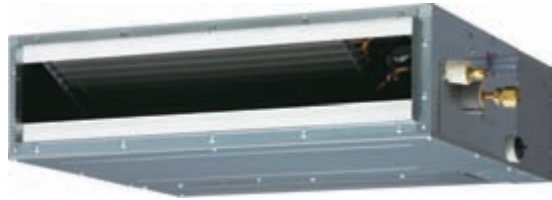

Wired R.C.



For ARTG18L

Inverter Ducted Split Systems – Slimline Type

ARTG24L

C 7.10 kW / 24,200 BTU/h

H 8.00 kW / 27,300 BTU/h

ARTA30L

C 8.50 kW / 29,000 BTU/h

H 10.0 kW / 34,100 BTU/h

ARTA36L


C 10.0 kW / 34,100 BTU/h

H 11.2 kW / 38,200 BTU/h

ARTA45L

C 12.5 kW / 42,700 BTU/h

H 14.0 kW / 47,800 BTU/h

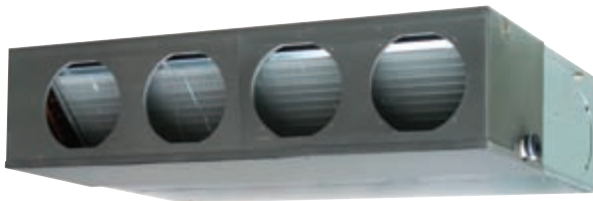

Wired R.C.



For ARTG24L
ARTA30L



For ARTA36/45L
(For single phase)

Inverter Ducted Split Systems – High Static

ARTG30LHTA

C 9.0kW/ 30,700BTU/h

H 11.2kW/ 38,200BTU/h

ARTG36LHTA

C 10.5kW/ 35,800BTU/h

H 12.1kW/ 41,300BTU/h



Wired type
(with weekly/
setback timer)



For ARTG30/36L

Inverter Ducted Split Systems – High Static

ARTG45LHTA

C 12.5 kW / 42,700 BTU/h

H 14.0 kW / 47,800 BTU/h

ARTG54LHTC

C 14.0kW/ 47,800BTU/h

H 16.0kW/ 54,600BTU/h



Wired type
(with weekly/
setback timer)



For ARTG45/54L

Inverter Ducted Split Systems – High Static – 3 Phase

ARTG36LHTB

C 10.5 kW / 35,800 BTU/h

H 12.1 kW / 41,300 BTU/h

ARTG45LHTB

C 12.5 kW / 42,700 BTU/h

H 14.0 kW / 47,800 BTU/h

ARTG60LHTA

C 15.0 kW / 51,200 BTU/h

H 18.0 kW / 61,500 BTU/h



Wired type
(with weekly/
setback timer)



For ARTG36/45LHTB
ARTG60LHTA

Inverter Ducted Split Systems – High Static – 3 Phase

ARTC72L

C 20.3 kW / 69,300 BTU/h

H 22.6 kW / 77,100 BTU/h



ARTC90L

C 25.0 kW / 85,300 BTU/h

H 28.0 kW / 95,500 BTU/h




Wired type
(with weekly/
setback timer)

Features & Benefits

Slim Line Ducted

Easy Maintenance

Structural improvement is attained by making the bottom panel two pieces, front and rear. The internal fan casing is also manufactured in two pieces, namely upper and lower. The maintenance of the motor and fan can be easily carried out by removing the rear panel and the lower part of the casing while leaving the main chassis installed.

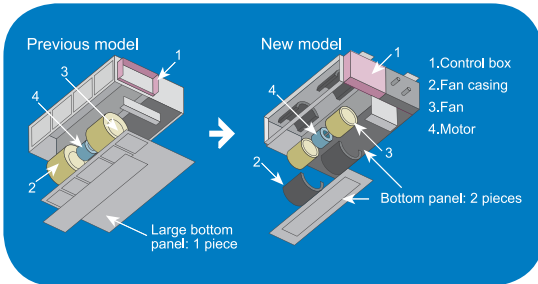

See above for the case of rear suction type.

Easy Installation

Main work settings can be done easily from the remote controller at installation.

Main Work Settings

- High ceiling setting
- Auto restart
- Temperature adjustment when cooling/heating.

Optional parts

- Flange (Round): UTD-RF204
- Flange (Square): UTD-SF045T
- Remote Sensor Unit: UTD-RS100
- External Control Set: UTD-ECSSA
- Drain Pump Unit: UTZ-PX1NBA

High Static Ducted

DC twin rotary compressor

High performance DC twin rotary compressor maximises efficiency from low speed to high speed operation.



Inverter Ducted – Bulkhead/Slim Type

TYPE	MODEL	UNITS	INVERTER					
Model No.	Indoor Unit		ARTG18LLTA	ARTG24LMC	ARTA30LBTU	ARTA36LATU	ARTA45LATU	
	Outdoor Unit		AOTG18LACC	AOTG24LATC	AOTA30LGTL	AOTA36LBTL	AOTA45LBTL	
Reverse Cycle System			Yes	Yes	Yes	Yes	Yes	
Cooling Capacity		Watts	5,200	7,100	8,500	10,000	12,500	
		BTU/h	17,700	24,200	29,000	34,100	42,700	
Range		Watts	900-5,900	2,900-8,000	2,800-10,000	3,800-11,200	4,000-14,000	
		BTU/h	31,00-20,100	9,900-27,300	9,500-34,100	13,000-38,200	13,700-47,800	
Heating Capacity		Watts	6,000	8,000	10,000	11,200	14,000	
		BTU/h	20,500	27,300	34,100	38,200	47,800	
Range		Watts	900-7,500	2,200-9,100	2,700-11,200	4,000-14,000	4,200-16,200	
		BTU/h	3,100-25,600	7,500-31,000	9,200-38,200	13,700-47,800	14,300-55,300	
Power Supply		Volts	240	240	240	240	240	
Phase-Frequency		Ph- Hz	1-50	1-50	1-50	1-50	1-50	
Power Supply Attachment			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	
Plug Size (If Applicable)		Amps	NA	NA	NA	NA	NA	
Running Current	Cooling	Amps	6.1	8.8	11.1	13	16.3	
	Heating		Max 9.6	Max 15.7	Max 17	Max 19	Max 20	
	Range		6.6	9.2	11.2	12.7	16.1	
Input	Range	Watts	Max 13.1	Max 15.7	Max 17	Max 19	Max 20	
	Cooling		1,450	2,090	2,650	3,110	3,890	
	Heating		Max 1,610	Max 2,400	Max 4040	Max 4,540	Max 4,780	
	Range		1,560	2,190	2,680	3,020	3,830	
	Range		Max 2,310	Max 2,750	Max 4040	Max 4,540	Max 4,780	
Moisture Removal		l/hr	2	2.5	2.5	3	3.5	
E.E.R.	Cooling		3.59	3.40	3.21	3.21	3.21	
C.O.P.	Heating		3.85	3.65	3.73	3.71	3.66	
Fan Speeds	Stage		4	4	4	4	4	
Air Circulation	High	l/s	261	305	542	513	583	
Compressor Type			Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	
Dimensions and Weights	I.U. mm	Height	198	270	270	270	270	
		Width	900	1,135	1,135	1,135	1,135	
		Depth	620	700	700	700	700	
	Net Weight	kg	23	38	40	40	40	
		O.U. mm	Height	620	830	830	1290	1290
			Width	790	900	900	900	900
			Depth	290	330	330	330	330
Net Weight	kg	41	60	61	98	98		
I.U. Sound Pressure Level		dBA@1metre	32	31	42	40	42	
O.U. Sound Pressure Level		dBA@1metre	55	53	53	54	55	
O.U. Sound Power Level		dBA	71	68	69	69	70	
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A	
Connection Pipe Sizes	Gas	mm	12.7	15.88	15.88	15.88	15.88	
	Liquid		6.35	6.35	9.52	9.52	9.52	
Pre Charged Length			15	15	20	20	20	
Minimum Pipe Length		Metre	3	3	5	5	5	
Maximum Pipe Length			30	30	50	50	50	
Maximum Pipe Height			20	30	30	30	30	
Pipe Connection Methods			Flare	Flare	Flare	Flare	Flare	
Outdoor operating Temp.	Cooling	Degrees C	-10 to 46	-10 to 46	-15 to 46	-15 to 46	-15 to 46	
	Heating	Degrees C	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	

DC Fan Motor

High performance and high efficiency compact DC fan motor.



Sine wave DC inverter control


High efficiency operation is realised by using a sine wave DC inverter control.



Low Noise

Low noise indoor unit:

The design of the indoor unit allows for a less turbulent air flow. Low noise is achieved by the adaptation of plastic fan and case.

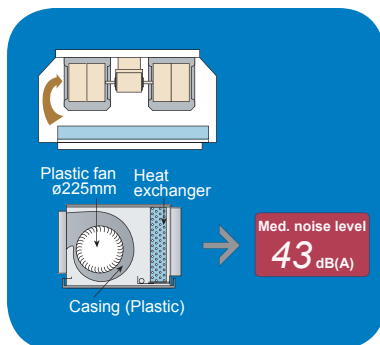

Low noise outdoor unit:

Introduction of a low outdoor noise operation mode allows the outdoor unit to have two quiet mode operation settings.



Inverter Ducted – High Static Inverter Ducted – High Static – 3 Phase

INVERTER				INVERTER				
ARTG30LHTA AOTG30LATL	ARTG36LHTA AOTG36LATL	ARTG45LHTA AOTG45LATL	ARTG54LHTC AOTG54LCTL	ARTG36LHTB AOTG36LATT	ARTG45LHTB AOTG45LATT	ARTG60LHTA AOTG60LATT	ARTC72LATU AOTA72LALT	ARTC90LATU AOTA90LALT
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
9,000	10,500	12,500	14,000	10,500	12,500	15,000	20,300	25,000
30,700	35,800	42,700	47,800	35,800	42,700	51,200	69,300	85,300
4,700-10,000	5,000-11,400	5,700-14,000	6,200-15,200	5,000-11,400	5,700-14,000	6,200-17,500	10,800-23,500	11,200-28,000
16,000-34,100	17,100-38,900	19,500-47,800	21,200-51,900	17,100-38,900	19,500-47,800	21,200-60,000	36,800-80,200	38,200-95,500
11,200	12,100	14,000	16,000	12,100	14,000	18,000	22,600	28,000
38,200	41,300	47,800	54,600	41,300	47,800	61,500	77,100	95,500
5,000-12,100	5,100-14,000	6,000-16,000	6,200-18,000	5,100-14,000	6,000-16,200	6,200-20,000	12,000-26,500	12,500-31,500
17,100-41,300	17,400-47,800	20,500-54,600	21,200-61,500	17,400-47,800	20,500-55,300	21,200-68,300	40,900-90,400	42,600-107,500
240	240	240	240	415	415	415	415	415
1-50	1-50	1-50	1-50	3-50	3-50	3-50	3-50	3-50
Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
NA	NA	NA	NA	NA	NA	NA	NA	NA
11.4	13.4	16.9	18.4	4.6	5.5	6.7	9.3	11.5
Max 18.1	Max 19.6	Max 22.5	Max 23.5	Max 9.0	Max 11.0	Max 12.5	Max 22.8	Max 25.8
12.4	13.9	16	18.3	4.8	5.3	7.3	9.3	12.1
Max 18.1	Max 20.1	Max 22.5	Max 23.5	Max 9.0	Max 11.0	Max 12.5	Max 22.8	Max 25.8
2,700	3,180	4,030	4,400	3,180	3,820	4,700	6,250	7,820
Max 4,300	Max 4,670	Max 5,380	Max 5,630	Max 5,630	Max 6,370	Max 7,400	Max 10,100	Max 12,500
2,950	3,300	3,800	4,370	3,300	3,670	5,150	6,270	8,240
Max 4,300	Max 4,800	Max 5,380	Max 5,630	Max 5,630	Max 6,370	Max 7,400	Max 10,100	Max 12,500
1	1.5	1	1	1.5	1.5	2.0	4.5	6.0
3.33	3.3	3.1	3.18	3.30	3.27	3.19	3.25	3.20
3.8	3.67	3.68	3.66	3.67	3.81	3.50	3.60	3.40
3	3	3	3	3	3	3	3	3
695	695	903	986	695	903	986	1,195	1,347
Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
400	400	425	425	400	425	425	450	550
1,050	1,050	1,250	1,250	1,050	1,250	1,250	1,587	1,587
500	500	490	490	500	490	490	700	700
39	39	54	54	39	54	54	100	110
1,290	1,290	1,290	1,290	1,290	1,290	1,290	1,690	1,690
900	900	900	900	900	900	900	930	930
330	330	330	330	330	330	330	765	765
86	86	86	93	104	104	104	215	215
41	41	43	45	41	43	45	47	49
52	52	55	55	51	54	56	57	58
67	68	69	70	67	68	71	75	78
R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
15.88	15.88	15.88	15.88	15.88	15.88	15.88	25.4	25.4
9.52	9.52	9.52	9.52	9.52	9.52	9.52	12.7	12.7
20	20	20	30	30	30	30	20	20
5	5	5	5	5	5	5	5	5
50	50	50	75	75	75	75	75	75
30	30	30	30	30	30	30	30	30
Flare	Flare	Flare	Flare	Flare	Flare	Flare	Brazed	Brazed
-5 to 46	-5 to 46	-5 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-5 to 46	-5 to 46
-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24

Inverter Cassette

Inverter Cassette Split Systems – Compact

AUTG18L

C 5.20 kW / 17,700 BTU/h

H 6.00 kW / 20,500 BTU/h

AUTG24L

C 7.10 kW / 24,200 BTU/h

H 8.00 kW / 27,300 BTU/h

Provide wide air flow & quiet operation.



Inverter Cassette Split Systems

AUTA30L

C 8.50 kW / 29,000 BTU/h

H 10.0 kW / 34,100 BTU/h

AUTA36L

C 10.0 kW / 34,100 BTU/h


H 11.2 kW / 38,200 BTU/h

AUTA45L

C 12.5 kW / 42,700 BTU/h

H 14.0 kW / 47,800 BTU/h

Provide wide air flow & quiet operation.

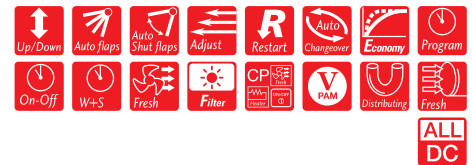

Inverter Cassette Split System – 3 Phase

AUTG54L

C 14.0 kW / 47,800 BTU/h

H 16.0 kW / 54,600 BTU/h

Provide wide air flow & quiet operation.




Features & Benefits – Inverter Cassette

High efficiency turbo fan with 3-dimensional blade

Previous turbo fan: Air passing through the heat exchanger was uneven and the air would only flow close to the ceiling.

New turbo fan: High efficiency airflow distribution has been achieved by the introduction of a 3-dimensional blade which increases the air passing over the heat exchanger.

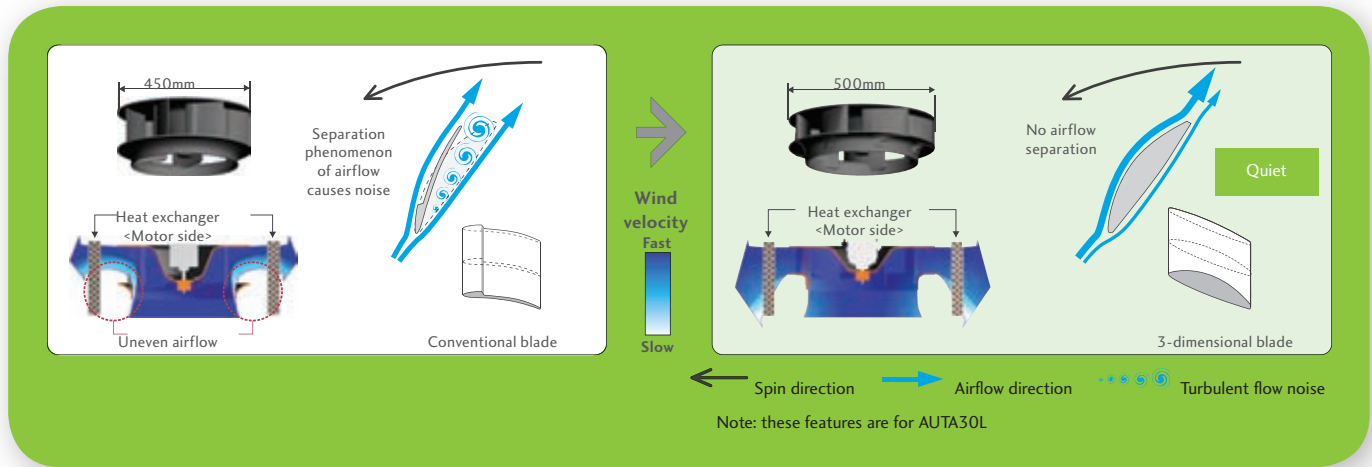

Inverter Cassette

TYPE	MODEL	UNITS	INVERTER					
			AUTG18LVLA	AUTG24VLC	AUTA30LBLU	AUTA36LCU	AUTA45LCU	AUTG54LRLLA
Model No.	Indoor Unit		AUTG18LVLA	AUTG24VLC	AUTA30LBLU	AUTA36LCU	AUTA45LCU	AUTG54LRLLA
	Outdoor Unit		AOTG18LACC	AOTG24LATC	AOTA30LGTL	AOTA36LCTL	AOTA45LCTL	AOTG54LATT
Reverse Cycle System			Yes	Yes	Yes	Yes	Yes	Yes
Cooling Capacity		Watts	5,200	7,100	8,500	10,000	12,500	14,000
		BTU/h	17,700	24,200	29,000	34,100	42,700	47,800
Range		Watts	900-5,900	2,900-8,000	2,800-10,000	3,500-11,200	4,000-14,000	5,400-16,000
		BTU/h	3,100-20,100	9,900-27,300	9,500-34,100	13,000-38,200	13,700-47,800	18,400-54,600
Heating Capacity		Watts	6,000	8,000	10,000	11,200	14,000	16,000
		BTU/h	20,500	27,300	34,100	38,200	47,800	54,600
Range		Watts	900-7,500	2,200-9,100	2,700-11,200	4,000-14,000	4,200-16,200	5,800-18,000
		BTU/h	3,100-25,600	7,500-31,000	9,200-38,200	13,700-47,800	14,300-55,300	19,800-61,500
Power Supply		Volts	240	240	240	240	240	415
Phase-Frequency		Ph- Hz	1-50	1-50	1-50	1-50	1-50	3-50
Power Supply Attachment			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Plug Size (If Applicable)		Amps	NA	NA	NA	NA	NA	NA
Running Current	Cooling	Amps	6.6	9.1	10.8	12.3	16.3	6.2
	Range		Max 9.6	Max 15.7	Max 17.0	Max 19.0	Max 20.0	Max 9.9
	Heating		7.0	9.3	11.6	12.5	16.1	6.3
	Range		Max 13.1	Max 15.7	Max 17.0	Max 19.0	Max 20.0	Max 9.9
Input	Cooling	Watts	1,560	2,160	2,570	2,940	3,890	4,360
	Range		Max 1,990	Max 2,470	Max 4,040	Max 4,540	Max 4,900	Max 6,720
	Heating		1,660	2,210	2,770	2,980	3,830	4,430
	Range		Max 2,520	Max 2,800	Max 4,040	Max 4,660	Max 4,900	Max 6,720
Moisture Removal		l/hr	2.2	2.7	2.5	3	4.5	5.0
E.E.R.	Cooling		3.33	3.29	3.31	3.4	3.21	3.21
C.O.P.	Heating		3.61	3.61	3.61	3.76	3.66	3.61
Star Rating	Cooling		2	2	2	2	1.5	NA
	Heating		2.5	2.5	2.5	2.5	2.5	NA
Fan Speeds			4	4	4	4	4	4
Air Circulation	High	l/s	189	258	444	500	528	556
Compressor Type			Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	DC Twin Rotary
Dimensions and Weights	I.U. (Grille)	Height	245(49)	245(49)	288(50)	288(50)	288(50)	288(50)
		Width	570(700)	570(700)	840(950)	840(950)	840(950)	840(950)
		Depth	570(700)	570(700)	840(950)	840(950)	840(950)	840(950)
	Net Weight	kg	15(2.6)	16(2.6)	26(5.5)	27(5.5)	27(5.5)	26(5.5)
		O.U. mm	Height	620	830	830	1,290	1,290
	O.U. mm	Width	790	900	900	900	900	900
		Depth	290	330	330	330	330	330
		Net Weight	kg	41	60	61	86	86
I.U. Sound Pressure Level		dBA@1metre	38	49	40	44	46	47
O.U. Sound Pressure Level		dBA@1metre	55	53	53	54	55	55
O.U. Sound Power Level		dBA	71	68	69	68	69	70
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A	R410A
Connection Pipe Sizes	Gas	mm	12.7	15.88	15.88	15.88	15.88	15.88
	Liquid	mm	6.35	6.35	9.52	9.52	9.52	9.52
Pre Charged Length			15	20	20	20	20	30
Minimum Pipe Length			3	3	5	5	5	5
Maximum Pipe Length		Metre	30	30	50	50	50	75
Maximum Pipe Height			20	30	30	30	30	30
Pipe Connection Methods			Flare	Flare	Flare	Flare	Flare	Flare
Outdoor operating Temp.	Cooling	Degrees C	-10 to 46	-10 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating	Degrees C	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24

Inverter Under Ceiling

Inverter Dual Console Split Systems – Floor/Ceiling

ABTG18L

C 5.20 kW / 17,700 BTU/h

H 6.00 kW / 20,500 BTU/h

ABTG24L

C 7.10 kW / 24,200 BTU/h

H 8.00 kW / 27,300 BTU/h



Wireless R.C

Optional



Wired R.C



For ABTG18L



For ABTG24L

Inverter Under Ceiling Split Systems

ABTA30L

C 8.50 kW / 29,000 BTU/h

H 10.0 kW / 34,100 BTU/h

ABTA36L

C 10.0 kW / 34,100 BTU/h

H 11.2 kW / 38,200 BTU/h

ABTA45L

C 12.5 kW / 42,700 BTU/h

H 14.0 kW / 47,800 BTU/h



Wireless R.C

Optional



Wired R.C



For ABTA30L



For ABTA36/45L

Inverter Under Ceiling Split System – 3 Phase

ABTG54L

C 14.0 kW / 47,800 BTU/h

H 16.0 kW / 54,600 BTU/h



Wireless R.C

Optional



Wired R.C



ABTG54L
(For 3 Phase)

Features & Benefits – Inverter Under Ceiling

Improved installation/maintenance

Improved handling during installation

The new outdoor unit is equipped with handles at the front and back at about the same height as the left and right so that the unit can be easily carried during installation, etc.



Check joint standard equipment

Service port is provided at the high pressure side of the refrigerant circuit. The operation of the air conditioning refrigeration system can be checked by connecting a pressure gauge, etc. and installation and maintenance work is improved.

Low noise realised

The outdoor unit's fan shape (large metal plate integrated bell mouth) reduces the air flow resistance and lowers noise levels (external fan guard) so units are less obtrusive to neighbours.

Setting by wired remote controller.



(Optional parts)

Inverter Under Ceiling



TYPE	MODEL	UNITS	INVERTER					
Model No.	Indoor Unit		ABTG18LVTA	ABTG24LVTC	ABTA30LBT	ABTA36LAT	ABTA45LAT	ABTG54LRTA
	Outdoor Unit		AOTG18LACC	AOTG24LATC	AOTA30LGTL	AOTA36LCTL	AOTA45LCTL	AOTG54LATT
Reverse Cycle System			Yes	Yes	Yes	Yes	Yes	Yes
Cooling Capacity		Watts	5,200	7,100	8,500	10,000	11,500	13,800
		BTU/h	17,700	24,200	29,000	34,100	39,300	47,100
Range		Watts	900-5,900	2,900-8,000	2,800-10,000	3,800-11,200	4,000-13,000	5,400-16,000
		BTU/h	3,100-20,100	9,900-27,300	9,500-34,100	13,000-38,200	13,700-45,400	18,400-54,600
Heating Capacity		Watts	6,000	8,000	10,000	11,200	14,000	16,000
		BTU/h	20,500	27,300	34,100	38,200	47,800	54,600
Range		Watts	900-7,500	2,200-9,100	2,700-11,200	4,000-14,000	4,200-15,500	5,800-18,000
		BTU/h	3,100-25,600	7,500-31,000	9,500-38,200	13,700-47,800	14,300-52,900	19,800-61,500
Power Supply		Volts	240	240	240	240	240	415
Phase-Frequency		Ph- Hz	1-50	1-50	1 0	1-50	1-50	3-50
Power Supply Attachment			Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
Plug Size (If Applicable)		Amps	NA	NA	NA	NA	NA	NA
Running Current	Cooling		6.4	9.0	10.8	13	14.9	6.2
	Range		Max 9.6	Max 15.7	Max 17.0	Max 19.0	Max 20.5	Max 9.9
	Heating	Amps	7.0	9.3	11.6	12.7	17.2	6.6
Input	Range		Max 13.1	Max 15.7	Max 17.0	Max 19.5	Max 20.5	Max 9.9
	Cooling		1,510	2,140	2,570	3,110	3,560	4,340
	Range	Watts	Max 1,820	Max 2,400	Max 4,040	Max 4,540	Max 4,900	Max 6,720
Moisture Removal	Heating		1,660	2,210	2,770	3,020	4,110	4,670
	Range		Max 2,350	Max 2,650	Max 4,040	Max 4,660	Max 4,900	Max 6,720
E.E.R.		l/hr	2	2.7	2.5	3	4.0	5.0
C.O.P.	Cooling		3.44	3.32	3.31	3.21	3.23	3.18
Star Rating	Heating		3.61	3.61	3.61	3.71	3.41	3.43
	Cooling		2	2	2	1.5	1.5	NA
Fan Speeds	Heating		2.5	2.5	2.5	2.5	2.0	NA
	Heating		4	4	4	4	4	4
Air Circulation	High	l/s	217	272	461	528	583	639
Compressor Type			DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
Dimensions and Weights	I.U. mm	Height	199	199	240	240	240	240
		Width	990	990	1,660	1,660	1,660	1,660
		Depth	655	655	700	700	700	700
	Net Weight	kg	27	27	46	46	46	48
		Height	620	830	830	1,290	1,290	1,290
	O.U. mm	Width	790	900	900	900	900	900
		Depth	290	330	330	330	330	330
		Net Weight	kg	41	60	61	98	98
I.U. Sound Pressure Level		dBA@1metre	44	49	45	47	49	51
O.U. Sound Pressure Level		dBA@1metre	50	53	53	54	55	55
O.U. Sound Power Level		dBA	65	68	69	69	70	70
Refrigerant	Type		R410A	R410A	R410A	R410A	R410A	R410A
Connection Pipe Sizes	Gas	mm	12.7	15.88	15.88	15.88	15.88	15.88
	Liquid		6.35	6.35	9.52	9.52	9.52	9.52
Pre Charged Length			15	20	20	20	20	30
Minimum Pipe Length		Metre	3	3	5	5	5	5
Maximum Pipe Length			30	30	50	50	50	75
Maximum Pipe Height			20	30	30	30	30	30
Pipe Connection Methods			Flare	Flare	Flare	Flare	Flare	Flare
Outdoor operating Temp.	Cooling	Degrees C	-10 to 46	-10 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating	Degrees C	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24

Inverter Multi Systems

A new Fujitsu Inverter Multi System is ideal where an individual indoor unit is required in more than one room, eg. a living room and 3 bedrooms. A Multi System allows for one outdoor unit to be connected to a wide variety of 2,3 or 4 indoor units including Wall Mounted, Floor/Ceiling Console, Cassette and Bulkhead Ducted models.

Wide Range of indoor units with various models & sizes

The range includes 6 different indoor unit types and 20 different models ranging in capacity from 2.3kW to 7.4kW. With such a wide range of options to choose from, there's a combination to suit almost any need from a small residence to a large shop.

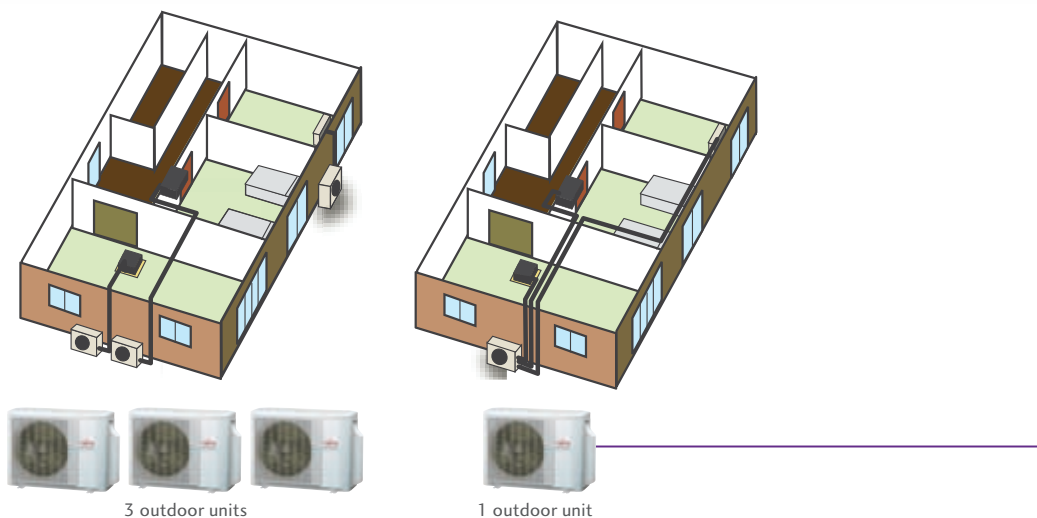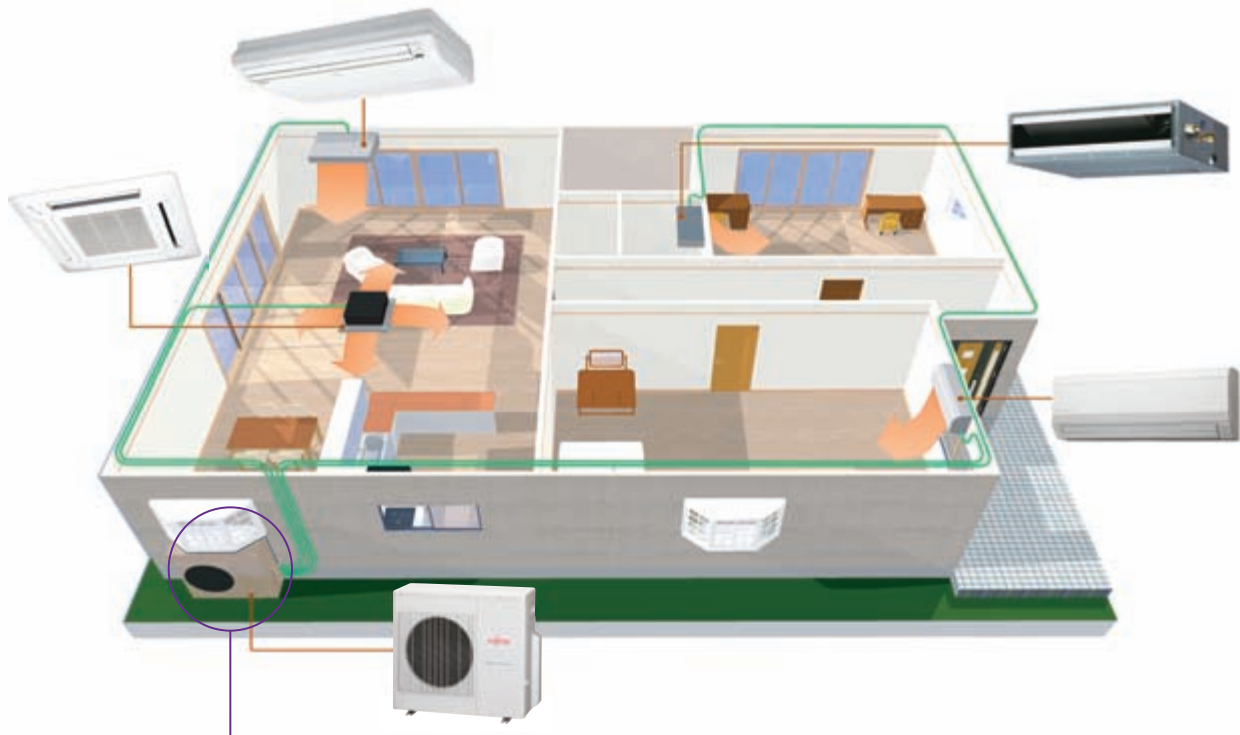


Space-saving installation

Multiple indoor units can be connected to 1 outdoor unit rather than multiple outdoor units. This means greater installation flexibility and space saving options. Long pipe runs offer even greater choices for installation.

Outdoor Units

3 room set-up

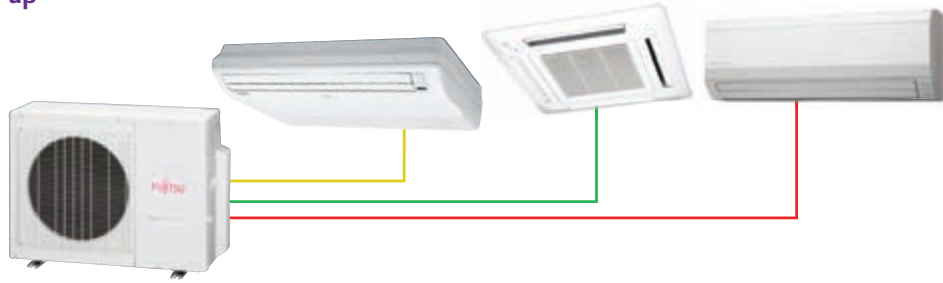

AOTG24LAT3

C 6.80kW/23,200 BTU/h

H 8.00kW/27,300 BTU/h

4 room set-up



AOTG30LAT4

C 8.00kW/27,300 BTU/h

H 9.60kW/32,800 BTU/h

ASTG07/09/12LV



ASTG09/14LU



ASTG18/24LF



ABTG18LV



AUTG09/12/18LV



ARTG09/12LL



ARTG18LL



INDOOR UNIT FEATURES



	Up/Down	Double	Adjust	Restart	Auto Changer	10°C	Fresh	Fresh	Economy	Sleep	Program	W+S	Weekly	Finer	Ion	AF	Wash	Auto Flaps	Auto Star Flaps	Human Sensor	ALL DC	
ASTG09/14LUCB	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
ASTG07/09/12LV	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
ASTG18/24LF	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
AUTG09/12/18LV	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
ABTG18LV	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
ARTG09/12/18LL	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

• Included function ○ Optional function

Indoor unit connection patterns

3 ROOMS – AOTG24LAT3 CONNECTABILITY						
NO.	ROOM 1	ROOM2	ROOM3	ROOM 4	TOTAL	
1	7	7	-	-	14	
2	7	9	-	-	16	
3	7	12	-	-	19	
4	7	14	-	-	21	
5	7	18	-	-	25	
6	9	9	-	-	18	
7	9	12	-	-	21	
8	9	14	-	-	23	
9	9	18	-	-	27	
10	12	12	-	-	24	
11	12	14	-	-	26	
12	12	18	-	-	30	
13	7	7	7	-	21	
14	7	7	9	-	23	
15	7	7	12	-	26	
16	7	7	14	-	28	
17	7	9	9	-	25	
18	7	9	12	-	28	
19	7	9	14	-	30	
20	7	9	12	-	31	
21	7	12	14	-	33	
22	9	9	9	-	27	
23	9	9	12	-	30	
24	9	9	14	-	32	
25	9	12	12	-	33	
26	9	12	14	-	35	
27	12	12	12	-	36	
4 ROOMS – AOTG30LAT4 CONNECTABILITY						
1	7	7	14	-	28	
2	7	7	18	-	32	
3	7	7	24	-	38	
4	7	9	12	-	28	
5	7	9	14	-	30	
6	7	9	18	-	34	
7	7	9	24	-	40	
8	7	12	12	-	31	
9	7	12	14	-	33	
10	7	12	18	-	37	
11	7	12	24	-	43	
12	7	14	14	-	35	
13	7	14	18	-	39	
14	7	14	24	-	45	
15	7	18	18	-	43	
16	7	18	24	-	49	
17	9	9	9	-	27	
18	9	9	12	-	30	
19	9	9	14	-	32	
20	9	9	18	-	36	
21	9	9	24	-	42	
22	9	12	12	-	33	
23	9	12	14	-	35	
24	9	12	18	-	39	
25	9	12	24	-	45	
26	9	14	14	-	37	
27	9	14	18	-	41	
28	9	14	24	-	47	
29	9	18	18	-	45	
30	12	12	12	-	36	
31	12	12	14	-	38	
32	12	12	18	-	42	
33	12	12	24	-	48	
34	12	14	14	-	40	
35	12	14	18	-	44	
36	12	18	18	-	48	
37	7	7	7	7	28	
38	7	7	7	9	30	
39	7	7	7	12	33	
40	7	7	7	14	35	
41	7	7	7	18	39	
42	7	7	9	9	32	
43	7	7	9	12	35	
44	7	7	9	14	37	
45	7	7	9	18	41	
46	7	7	12	12	38	
47	7	7	12	14	40	
48	7	7	12	18	44	
49	7	7	14	14	42	
50	7	9	9	9	34	
51	7	9	9	12	37	
52	7	9	9	14	39	
53	7	9	9	18	43	
54	7	9	12	12	40	
55	7	9	12	14	42	
56	7	9	12	18	46	
57	7	9	14	14	44	
58	7	12	12	12	43	
59	7	12	12	14	45	
60	7	12	12	18	49	
61	7	12	14	14	47	
62	9	9	9	9	36	
63	9	9	9	12	39	
64	9	9	9	14	41	
65*1	9	9	9	18	45	
66	9	9	12	12	42	
67	9	9	12	14	44	
68*2	9	9	12	18	48	
69	9	9	14	14	46	
70	9	12	12	12	45	
71	9	12	12	14	47	
72	9	12	14	14	49	

Notes

7: 7000BTU/h, 9:9000BTU/h, 12:12000BTU/h, 18: 18000BTU/h, 24: 24000BTU/h models

* 1: "ARTG09L + ARTG09L + ARTG09L + ASTG18L" can not be connected in this combination.

* 2: "ARTG09L + ARTG09L + ARTG12L + ASTG18L" can not be connected in this combination.

Indoor units that can be connected to each outdoor unit

• CONNECTED – NOT CONNECTED

OUTDOOR	COMPACT CASSETTE				SLIM DUCT			COMPACT WALL MOUNTED				WALL MOUNTED		FLOOR/CEILING		
	AOTG09-18LVLA				ARTG09-18LLTA			LV		LU		ASTG18LFCA ASTG24LFCC				
	BTU Class	09	12	18	09	12	18	ASTG07LVCA ASTG09-12LVCC	07	09	12	09	14		18	24
kW Class	2.5	3.5	5.0	2.5	3.5	5.0	2.0	2.5	3.5	2.5	4.0	5.0	7.0	5.0	7.0	5.0
3 Rooms	AOTG24LAT3	•	•	•	•	•	•	•	•	•	•	•	•	•	-	•
4 Rooms	AOTG30LAT4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

Controller Options



TYPE	MODEL	INDOOR UNITS		Wall Mounted	Floor/Ceiling
		Compact Cassette	Slim Duct		
Wired Remote Controller	UTY-RNNYN	○	●	○*2 ○*2	○
Wireless Remote Controller	AR-RAH2E	-	-	- -	● ●
	AR-RAH1E	●	-	● -	- -
	AR-REA1E	-	-	- ●	- -
IR Receiver Unit	UTY-LRHYM	-	○	- -	- -
Simple Remote Controller	UTY-RSNNY	○	○	○*2 ○*2	○

- : Accessory
- : Optional, - : it is not possible to connect it
- *1: Optional Communication kit (UTY-XCBXZ1) is necessary for the installation.
- *2: Optional Communication kit (UTY-TWBXF) is necessary for the installation.

Inverter Multi Systems


TYPE	MODEL	UNITS	WALL MOUNTED – DESIGNER RANGE				WALL MOUNTED				
			ASTG09LUCB		ASTG14LUCB		ASTG07LVCA		ASTG09LVCC		
Model No.	Indoor Unit	Outdoor Unit	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	
Reverse Cycle System			Yes		Yes		Yes		Yes		
Capacity Class		kW	2.5		4.0		2		2.5		
Cooling Capacity	Watts		2,700	2,700	4,200	4,000	2,300	2,300	2,700	2,700	
	BTU/h		9,220	9,220	14,343	13,660	7,854	7,854	9,220	9,220	
Range (Maximum for Inverter Multi)	Watts		3,300	3,400	4,800	4,500	2,700	2,700	3,300	3,400	
	BTU/h		11,270	11,611	16,392	15,368	9,220	9,220	11,270	11,611	
Heating Capacity	Watts		3,300	3,300	4,800	4,800	2,700	2,700	3,300	3,300	
	BTU/h		11,270	11,270	16,392	16,392	9,220	9,220	11,270	11,270	
Range (Maximum for Inverter Multi)	Watts		4,200	3,700	5,800	5,800	3,300	3,300	4,200	3,700	
	BTU/h		14,343	12,636	19,808	19,808	11,270	11,270	14,343	12,636	
Power Supply		Volts	240		240		240		240		
Phase-Frequency		Ph- Hz	1-50		1-50		1-50		1-50		
Power Supply Attachment			Outdoor		Outdoor		Outdoor		Outdoor		
Plug Size (If Applicable)		Amps	NA		NA		NA		NA		
Running Current	Cooling	Amps									
	Range	Amps	0.14		0.2		0.14		0.14		
	Heating	Amps									
	Range	Amps									
Input	Cooling	Watts									
	Range	Watts	16		23		16		16		
	Heating	Watts									
	Range	Watts									
Moisture Removal		l/hr									
E.E.R.	Cooling		-	-	-	-	-	-	-	-	
C.O.P.	Heating		-	-	-	-	-	-	-	-	
Star Rating	Cooling		-	-	-	-	-	-	-	-	
	Heating		-	-	-	-	-	-	-	-	
Fan Speeds			4		4		4		4		
Air Circulation	High	l/s	167		197		178		178		
Compressor Type			DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	
Dimensions and Weights	I.U. mm	Height	282		282		293		293		
		Width	870		870		790		790		
		Depth	185		185		225		225		
	O.U. mm	Height	700	830	700	830	700	830	700	830	
		Width	900	900	900	900	900	900	900	900	
		Depth	330	330	330	330	330	330	330	330	
	Net Weight		kg	9.5		9.5		9.5		9.5	
	Net Weight		kg	55	68	55	68	55	68	55	68
I.U. Sound Pressure Level		dBA@1metre	36		41		36		36		
O.U. Sound Pressure Level		dBA@1metre	48	50	48	50	48	50	48	50	
O.U. Sound Power Level		dBA	64	64	64	64	64	64	64	64	
Refrigerant	Type		R410A		R410A		R410A		R410A		
Connection Pipe Sizes	Gas	mm	9.52		12.7		9.52		9.52		
	Liquid	mm	6.35		6.35		6.35		6.35		
Pre Charged Length			-		-		-		-		
Minimum Pipe Length			5		5		5		5		
Maximum Pipe Length per unit Inverter Multi only			-		-		-		-		
Maximum Pipe Length			25		25		25		25		
Maximum Pipe Height			10		10		10		10		
Pipe Connection Methods			Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	
Outdoor operating Temp	Cooling	Degrees C	-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46	
	Heating	Degrees C	-15 to 24	-10 to 24	-15 to 24	-10 to 24	-15 to 24	-10 to 24	-15 to 24	-10 to 24	

* Specifications for each indoor unit listed is subject to the outdoor unit which it is connected to. Please consult a Fujitsu stockist for further information.


Flexible Installation

Fujitsu Multi type systems can be installed in large buildings and over multiple floors due to the maximum allowable piping length.

Max. Piping Length (Each Unit):
25m (AOTG24LAT3/30LAT4)



Max. Height:
15m (AOTG24LAT3/30LAT4)



Total Piping Length:
50m (AOTG24LAT3)
70m (AOTG30LAT4)

Innovative Technology



High efficiency large fan

New designed fan has been used to increase airflow efficiency.



Heat exchanger

A new 3 row heat exchanger has been used which allows for a more compact outdoor unit with higher energy efficiency.



DC fan motor

High performance and High efficiency has been achieved by using a new small DC Fan motor.



High efficiency DC twin rotary compressor


A high performance, low noise, large capacity DC twin rotary compressor is used.

Inverter Multi Systems

WALL MOUNTED						COMPACT CASSETTE					
ASTG12LVCC		ASTG18LFCA		ASTG24LFCC		AUTG09LVLA		AUTG12LVLA		AUTG18LVLA	
AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4
Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
3,500	3,500	5,000	5,200	-	6,800	2,700	2,700	3,500	3,500	5,000	5,200
11,953	11,953	17,075	17,758	-	23,223	9,220	9,220	11,953	11,953	17,075	17,758
3,700	3,800	5,600	6,000	-	7,400	3,300	3,400	3,700	3,800	5,600	6,000
12,636	12,977	19,125	20,491	-	25,272	11,270	11,611	12,636	12,977	19,125	20,491
3,800	3,800	6,000	6,000	-	8,200	3,300	3,300	3,800	3,800	6,000	6,000
12,977	12,977	20,491	20,491	-	28,004	11,270	11,270	12,977	12,977	20,491	20,491
4,800	4,500	7,100	7,100	-	9,000	4,200	3,700	4,800	4,500	7,100	7,100
16,392	15,368	24,247	24,247	-	30,736	14,343	12,636	16,392	15,368	24,247	24,247
240	240	240	240	240	240	240	240	240	240	240	240
1-50	1-50	1-50	1-50	1-50	1-50	1-50	1-50	1-50	1-50	1-50	1-50
Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor
NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
0.16	0.16	0.33	0.33	-	0.53	0.15	0.15	0.19	0.19	0.3	0.3
19	19	37	37	-	69	18	18	23	23	39	39
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-
4	4	4	4	4	4	4	4	4	4	4	4
194	194	250	250	311	311	150	150	169	169	208	208
DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
293	320	320	320	320	320	245 (49)	245 (49)	245 (49)	245 (49)	245 (49)	245 (49)
790	998	998	998	998	998	570 (700)	570 (700)	570 (700)	570 (700)	570 (700)	570 (700)
225	238	238	238	238	238	570 (700)	570 (700)	570 (700)	570 (700)	570 (700)	570 (700)
9.5	14	14	14	14	14	15 (2.6)	15 (2.6)	15 (2.6)	15 (2.6)	15 (2.6)	15 (2.6)
700	830	700	830	700	830	700	830	700	830	700	830
900	900	900	900	900	900	900	900	900	900	900	900
330	330	330	330	330	330	330	330	330	330	330	330
55	68	55	68	55	68	55	68	55	68	55	68
38	43	43	43	49	49	33	33	37	37	42	42
48	50	48	50	48	50	48	50	48	50	48	50
64	64	64	64	64	64	64	64	64	64	64	64
R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A	R410A
9.52	12.7	12.7	12.7	15.88	15.88	9.52	9.52	9.52	9.52	12.7	12.7
6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35	6.35
-	-	-	-	-	-	-	-	-	-	-	-
5	5	5	5	5	5	5	5	5	5	5	5
-	-	-	-	-	-	-	-	-	-	-	-
25	25	25	25	25	25	25	25	25	25	25	25
10	10	10	10	10	10	10	10	10	10	10	10
Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare
-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46
-15 to 24	-10 to 24	-15 to 24	-10 to 24	-15 to 24	-10 to 24	-15 to 24	-10 to 24	-15 to 24	-10 to 24	-15 to 24	-10 to 24

10°C HEAT Operation

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.

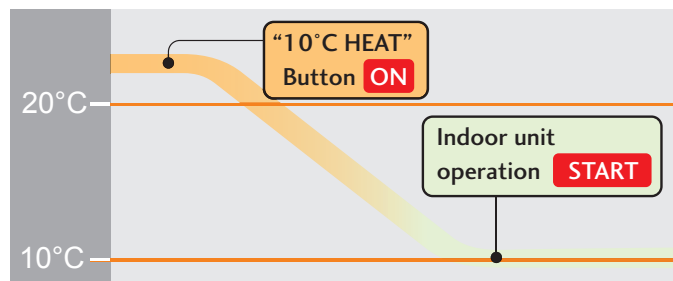


Caution

When the room temperature is higher than 10°C, "10°C HEAT" operation does not start. Operation starts and maintains the room temperature at 10°C when the temperature drops below 10°C.

Economy Operation

Economy operation is an energy saving setting that allows the set temperature of the indoor unit to change by 1°C intervals which limits the maximum energy usage of the air conditioner.

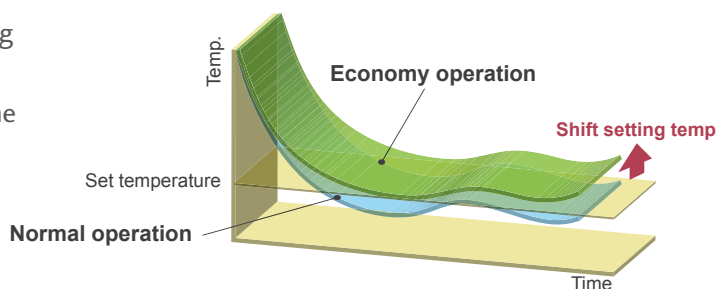

FLOOR/CEILING		SLIM DUCT				OUTDOOR UNIT			
ABTG18LVT4		ARTG09LLTA		ARTG12LLTA		ARTG18LLTA			
AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4	AOTG24LAT3	AOTG30LAT4
Yes		Yes		Yes		Yes		Yes	
5		2.5		3.5		5			
5,000	5,200	2,700	2,700	3,500	3,500	5,000	5,200	6,800	8,000
17,075	17,758	9,220	9,220	11,953	11,953	17,075	17,758	25,200	27,300
5,600	6,000	3,300	3,400	3,700	3,800	5,600	6,000	1,800-8,500	3,500-10,100
19,125	20,491	11,270	11,611	12,636	12,977	19,125	20,491	6,100-29,000	11,940-34,500
6,000	6,000	3,300	3,300	3,800	3,800	6,000	6,000	8,000	9,600
20,491	20,491	11,270	11,270	12,977	12,977	20,491	20,491	27,300	32,800
7,100	7,100	4,200	3,700	4,800	4,500	7,100	7,100	2,000-9,200	3,700-12,000
24,247	24,247	14,343	12,636	16,392	15,368	24,247	24,247	6,800-31,400	12,620-41,000
240		240		240		240		240	240
1-50		1-50		1-50		1-50		1-50	1-50
Outdoor		Outdoor		Outdoor		Outdoor		Outdoor	Outdoor
NA		NA		NA		NA		NA	NA
								8.1	9.3
0.36		0.3		0.35		0.44		Max 10.9	Max 15.0
								8.4	10.1
								Max 12.1	Max 15.0
								1,940	2,220
47		49		58		73		Max 2,600	Max 3,560
								2,000	2,400
								Max 2,870	Max 3,580
-	-	-	-	-	-	-	-	3.5	3.6
-	-	-	-	-	-	-	-	4	4
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
4		4		4		4		2	2
217		167		181		261		917	
DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary	DC Twin Rotary
199		198		198		198		-	-
990		700		700		900		-	-
655		620		620		620		-	-
27		19		19		23		-	-
700	830	700	830	700	830	700	830	700	830
900	900	900	900	900	900	900	900	900	900
330	330	330	330	330	330	330	330	330	330
55	68	55	68	55	68	55	68	55	68
41(UC)/44(FC)		28		29		32		-	-
48	50	48	50	48	50	48	50	48	50
64	64	64	64	64	64	64	64	64	64
R410A		R410A		R410A		R410A		R410A	R410A
12.7		9.52		9.52		12.7		2 x 9.52, 1 x 12.7	2 x 9.52, 2 x 12.7
6.35		6.35		6.35		6.35		3 x 6.35	4 x 6.35
-		-		-		-		30	50
5		5		5		5		15	20
-		-		-		-		25	25
25		25		25		25		Max Total 50	Max Total 70
10		10		10		10		15 (IU to OU)	15 (IU to OU)
Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare	Flare
-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46	-10 to 46	0 to 46
-15 to 24	-10 to 24	15 to 24	-10 to 24	-15 to 24	-10 to 24	-15 to 24	-10 to 24	-15 to 24	-10 to 24

Energy Recovery Ventilator (ERV)

Effective heat exchange and simultaneous fresh air ventilation

High efficiency and low noise levels are achieved by using a highly efficient heat exchange process. A comfortable air conditioned environment is achieved by conveniently selecting whether to use heat exchange or normal ventilation setting, according to requirements of the conditioned space.

Energy saving ventilation

Air conditioning operation can be reduced thanks to the efficient recovery of thermal energy lost during ventilation.

Load reduction

Load reduction within the conditioned space can be achieved as the heat exchanger effectively recovers cooled or heated room temperatures and simultaneously ventilates the air.

Humidity adjusting effect

By efficient use of the heat transfer device within the ERV, fresh air humidity levels are balanced more effectively.


Sound shield effect

The ducts of the unit and the heat exchange element create a sound shield effect. This ensures that the working environment noise levels are preserved.

Heat exchange ventilation and normal ventilation

Heat exchange ventilation

When a room is cooled or heated, the exhausted cooling / heating energy is recovered by heat-exchange ventilation.

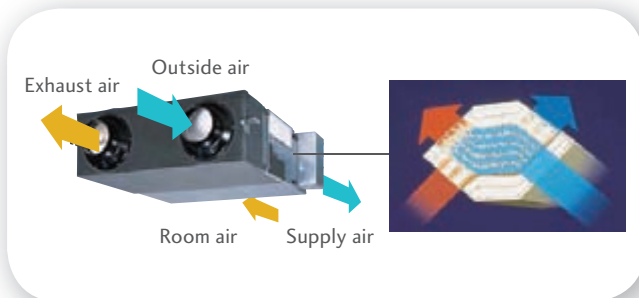

Adopts a highly efficient counter-flow heat exchange element.

Normal ventilation

This operation is used during periods when rooms require no cooling or heating effect, i.e. when there is minimal temperature difference between the indoor and outdoor environments.

High energy efficiency

20%
Energy saving

Energy consumption is dramatically reduced by using a counterflow heat-exchange element. Air conditioning load is reduced by approximately 20%, resulting in significant energy savings. Recovers up to 77% of the heat in the outgoing air.

More comfort

Quiet operation

Significantly reduces low pressure loss which allows a low noise operation of 32dBA or less on high fan operation (138 L/Sec model).

Energy Recovery Ventilator unit offers maximum comfort and greater energy savings

Energy Recovery Ventilator available in five sizes to suit most applications.



UTZ-BX025A



UTZ-BX035A



UTZ-BX050A




UTZ-BX080A




UTZ-BD100A

Slim shape and easier installation

Counter-flow heat exchange element used for reduced noise and slimmer, more compact body shape.



UTZ-BX025A/BX035A/BX050A



UTZ-BX080A/BD100A

Energy Recovery Ventilator

RATED FLOW RATE				69 L/Sec	97 L/Sec	138 L/Sec	222 L/Sec	277 L/Sec
MODEL NO.				UTZ-BX025A	UTZ-BX035A	UTZ-BX050A	UTZ-BX080A	UTZ-BD100A
Power Source				220-240, 50Hz				
Heat Exchange Ventilation	Input Power	Extra High/High/Low	W	119/99/79	154/124/117	214/169/151	347/309/302	445/360/332
	Air Flow Rate	Extra High/High/Low	L/sec	69/69/47	97/97/77	138/138/102	222/222/180	277/277/225
	External Static Pressure	Extra High/High/Low	Pa	90/80/37	95/65/42	105/70/38	140/110/70	90/55/35
	Temperature Exchange Efficiency	Extra High/High/Low	%	75/75/77	75/75/77	75/75/77	75/75/76	75/75/76
	Energy Exchange Efficiency Cooling	Extra High/High/Low	%	63/63/66	66/66/69	62/62/67	65/65/68	65/65/68
	Energy Efficiency Exchange Heat Pump	Extra High/High/Low	%	70/70/73	69/69/71	67/67/71	71/71/74	71/71/73
	Sound Pressure Level	Extra High/High/Low	dB	28/26/21	32/29/25	34/31/25	38/36.5/32	37.5/36/31
Normal Ventilation	Input Power	Extra High/High/Low	W	119/98/79	151/119/113	210/161/145	337/300/397	438/358/329
	Air Flow Rate	Extra High/High/Low	L/sec	69/69/47	97/97/77	138/138/102	222/222/180	277/277/225
	External Static Pressure	Extra High/High/Low	Pa	90/80/37	95/65/42	105/70/38	140/110/70	90/55/35
	Sound Pressure Level	Extra High/High/Low	dB	27/26.5/21.5	31/30/26	34/32/26.5	38.5/37/33	38/36.5/31.5
Dimensions		H x W x D	mm	882 x 599 x 270	882 x 804 x 270	962 x 904 x 270	1,322 x 884 x 388	1,322 x 1,134 x 388
Weight			kg	29	37	43	71	83
Outlet Duct Diameter			mm	150	150	200	250	250
Operation Range			°C	-10 to 40	-10 to 40	-10 to 40	-10 to 40	-10 to 40
Maximum Humidity			%	85	85	85	85	85

* The noise level must be measured 1.5 m below the centre of the unit.

Products in this brochure contain R410A refrigerant. Please refer to specifications before installation & servicing this product.

Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so. The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty & service is required.


For future improvement, specifications, designs of product and availability are subject to change without notice. Please check with your dealer.

All Capacity and Energy Efficiency ratings are based on AS/NZS3823.2.

Cooling Indoor Temp: 27°C DB/19°C WB
Outdoor Temp: 35°C DB

Heating Indoor Temp: 20°C DB
Outdoor Temp: 7°C DB /6°C WB

Running current is at rated conditions (AS3823) and does not include compressor start-up or variations in power supply and load conditions.



FUJITSU COMFORT

AUSTRALIA'S FAVOURITE AIR™



Distributed by:

FUJITSU GENERAL (AUST.) PTY LIMITED

ABN 55 001 229 554
A Subsidiary of FUJITSU GENERAL LIMITED
www.fujitsugeneral.com.au

HEAD OFFICE

NSW Eastern Creek Drive, Eastern Creek NSW 2766 TEL (02) 8822 2500 FAX (02) 8822 2501

VIC/TAS Suite 1, Building 2, Omnicore Business Centre, 270 Ferntree Gully Road, Notting Hill VIC 3168 TEL (03) 9543 5899 FAX (03) 9543 8299

QLD 1 Breakfast Creek Road, Newstead QLD 4006 TEL (07) 3257 2800 FAX (07) 3257 2184

SA/NT 128A Rose Terrace, Wayville SA 5034 TEL (08) 8172 1180 FAX (08) 8172 1190

WA Suite 3, 5 Mumford Place, Balcatta WA 6021 TEL (08) 9240 5877 FAX (08) 9240 5866

E-mail: contact@fujitsugeneral.com.au – or call 1300 882 201